



Technical Informations

RENAULT TRUCKS TRAFIC

renault-trucks.com



**RENAULT
TRUCKS**

Technical specifications

VARIOUS MODELS

→ L1H1 VAN



→ L2H1 VAN CREW



→ L2H1 VAN



→ L2H1 COMBI (available on diesel only)



→ L2H2 VAN



→ L2 PLATFORM CAB



COLOURS

SOLID LACQUER COLOURS



Glacier White*



Urban Grey



Cumulus Blue

METALLIC COLOURS



Highland Grey*



Comet Grey*



Carmin Red*



Midnight Black*

*Colors available for Red EDITION Exclusive version


Finishes

Red EDITION



UPHOLSTERY

Carbon grey fabric

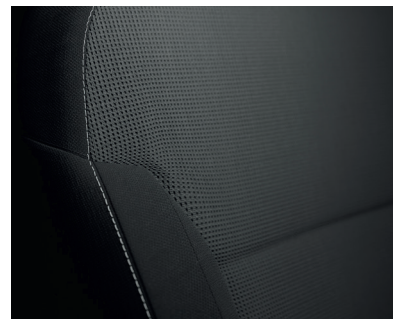

EXTERIOR DESIGN

Chrome radiator grille - Half-painted front bumper, body-coloured side hatch rail and light mounts



WHEEL RIMS

Metal 16" - standard hub casing




Red EDITION Exclusive



UPHOLSTERY

Black geometric fabric

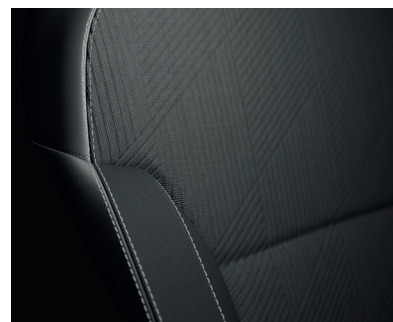

EXTERIOR DESIGN

Chrome radiator grille - semi-painted front bumper, body-coloured side hatch rail, light mounts, side guards, rear bumper and mirrors, Red EDITION stickers



WHEEL RIMS

Aluminium 17" - Dark grey



Accessories



Towing hook



Roof rack solutions



Red EDITION seats covers



Specific Renault Trucks wood trimming




Red EDITION floor mat

Range overview


	Van		Van crew		Platform cab	9-seater Combi
	L1H1 L2H1	L1H2 L2H2	L1H1 L2H1		L2	L1H1 L2H1
Equipment level	Red Edition Red Edition EXCLUSIVE		Red Edition Red Edition EXCLUSIVE		Red Edition	Red Edition
Manual gearbox engine	110 hp 130 hp 150 hp 170 hp		150 hp 170 hp		150 hp 170 hp	150 hp
Automated dual clutch engines	150 hp 170 hp		-		-	150 hp 170 hp
GCW	L1H1 : 3T L2H1 : 3T1		3T		3T	2T8

Power train

	110 hp Stop & Start	130 hp Stop & Start	150 hp Stop & Start	170 hp Stop & Start
Engine capacity	4 cylinders / 2.0 L / Single Turbo			
Maximum power at 3500 rpm	81 kW	96 kW	110 kW	125 kW
Maximum torque at 1500 rpm	300 Nm	320 Nm	350 Nm	380 Nm
Type of injection	Common Rail Direct Injection (2500 bar)			
Tank Capacity (Fuel / AdBlue)	80 L / 24.7 L			
Transmission	Manual 6-speed		Manual 6-speed / 6-Speed robotized dual clutch	
Standard	EURO 6 E-FULL			
Cycle	WLTP (Worldwide harmonized Light vehicles Test Procedures)			
Fuels compliant with European standards with which the engines of vehicles sold in Europe are compatible	B7 : EN590 compliant fuel containing up to 7% fatty acid methyl esters by volume B10 : EN16734 compliant fuel containing up to 10% fatty acid methyl esters by volume XTL : EN15940 compliant paraffinic diesel fuel containing up to 7% fatty acid methyl esters by volume			

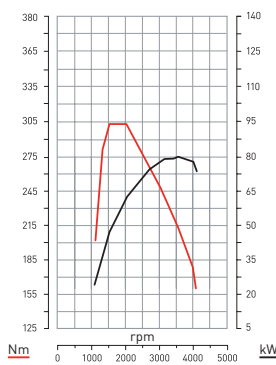


110 hp

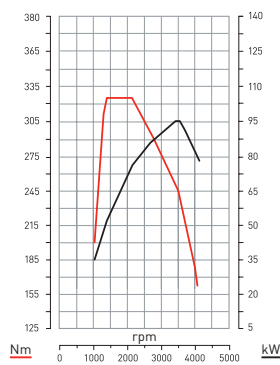

130 hp



150 hp

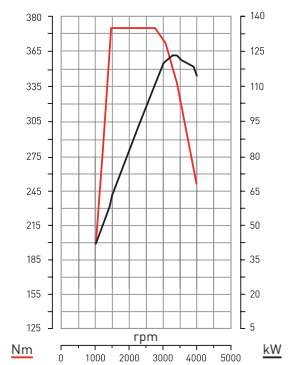

170 hp

E-Tech (Electric version)

	Panel Van			Van crew		Platform
	L1H1	L2H1	L2H2	L1H1	L3H1	L2
GVW	3.07 Tons					
Payload	1.16 Tons					
Load volume	5.8 m ³	7.75 m ³	8.9 m ³	3.36 m ³	4 m ³	-
Battery	52 kWh / 400V / 332 kg / 48 modules / 192 cells					
Maximum speed	110 km/h or 90 km/h					
Motor type	R120 / Max Power : 90kW - 120 hp / Max Torque : 245 Nm					



Weights and dimensions

Van / Van crew


FRONT-WHEEL DRIVE	Van				Van crew	
	L1H1	L1H2	L2H1	L2H2	L1H1	L2H1
GCW	3 t	3 t	3.1 t	3 t	3 t	3 t
External dimensions						
Overall length	5080 mm		5480 mm		5080 mm	5480 mm
Long overhang	1014 mm					
Wheelbase	3098 mm		3498 mm		3098 mm	3498 mm
Rear overhang	968 mm					
Overall width / with wing mirrors	1956 / 2283 mm					
Total height	1971 mm	2495 mm	1967 mm	2498 mm	1971 mm	1967 mm
Turning circle, kerb-to-kerb / wall-to-wall	6.2 / 6.4 m		6.9 / 7.18 m		6.2 / 6.4 m	6.9 / 7.18 m
Min. ground clearance	160 mm					
Weight and loads						
Max. load on front axle	1625 kg					
Max. load on rear axle	1650 kg					
Maximum towable mass (unbraked / braked) manual gearbox	750 / 2500 kg					
Maximum towable mass (unbraked / braked) 6-Speed robotized	750 / 1680 kg	-	750 / 1680 kg	-	750 / 1680 kg	750 / 1680 kg
Loading area (mm)						
Effective volume	5.8 m ³	6.7 m ³	7.75 m ³	8.9 m ³	3.36 m ³	4.3 m ³
Width x length of bulkhead hatch	510 X 222 mm				-	
Internal effective length / to 1m	2537 mm		2937 mm		2023 / 1340 mm	2423 / 1740 mm
Internal effective floor length including under-seat area / footwell	2950 / 3750 mm		3350 / 4150 mm		-	
Effective height	1387 mm	1898 mm	1387 mm	1898 mm	1387 mm	
Internal effective width	1662 mm					
Width between wheel arches	1268 mm					
Sliding side hatch(es)						
Height	1284 mm					
Width to 100 mm / 600 mm	1030 / 907 mm					
Rear doors						
Height	1320 mm	1820 mm	1320 mm	1820 mm	1320 mm	1820 mm
Width (to 70 mm)	1391 mm					
Loading sill	552 mm					

Cabs




VAN




L1H1

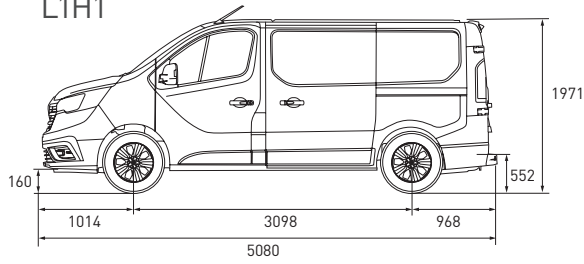


L2H1

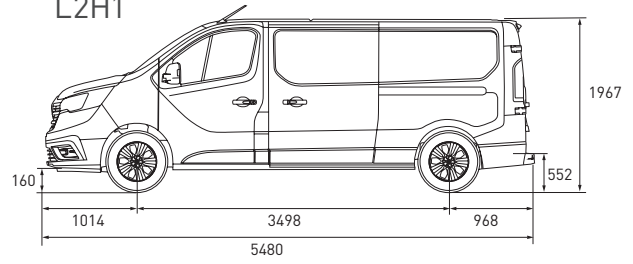



L1H2

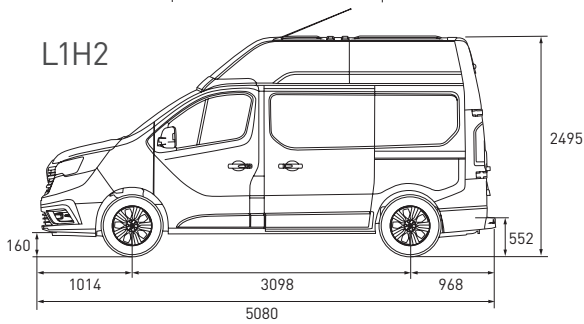


L2H2

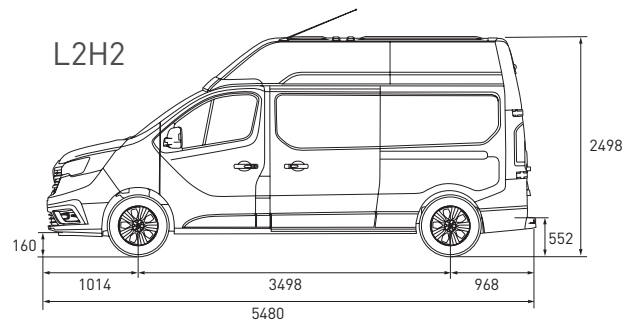


VAN CREW



L1H1

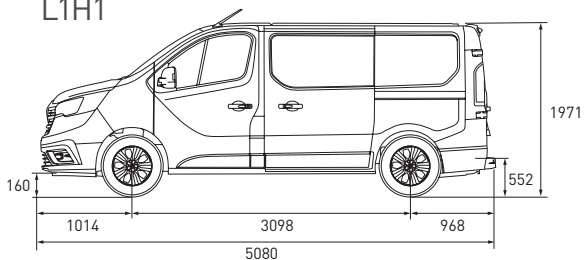

L2H1

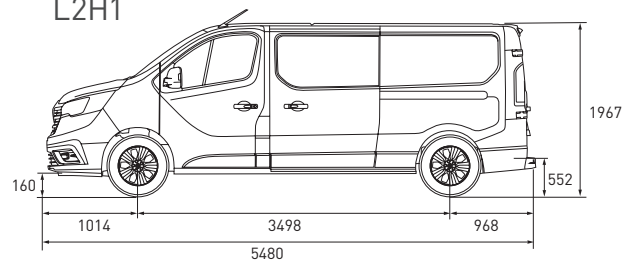

Weights and dimensions



Platform cab / 9-seater Combi

(available on diesel version only)


	Platform Cab	9-seater Combi	
FRONT-WHEEL DRIVE	L2	L1H1	L2H1
GCW	3 t	3 t	3 t
External dimensions			
Overall length	5248 mm	5080 mm	5480 mm
Long overhang	1014 mm		
Wheelbase	3498 mm	3098 mm	3498 mm
Rear overhang	817 mm	968 mm	
Overall width / with wing mirrors	1956 / 2283 mm	1956 / 2283 mm	
Total height	1967 mm	1971 mm	1967 mm
Turning circle, kerb-to-kerb / wall-to-wall	6.9 m / depending on body	6.2 / 6.4 m	6.9 / 7.18 m
Min. ground clearance	160 mm	160 mm	
Weight and loads			
Max. load on front axle	1585 kg	1625 kg	
Max. load on rear axle	1650 kg	1650 kg	
Maximum towable mass (unbraked / braked) manual gearbox	750 / 2000 kg	750 / 2500 kg	
Maximum towable mass (unbraked / braked) 6-Speed robotized	-	750 / 1680 kg	750 / 1680 kg
Effective volume			
8-9 seater model	-	1 m ³	1.8 m ³
3rd row folded down / removed	-	2.5 / 3.2 m ³	3.4 / 4.1 m ³
2nd row folded down / removed	-	4.7 / 5.2 m ³	5.7 / 6.0 m ³
Internal dimensions			
Loading length in 8-9 seater version	-	736 mm	1136 mm
Loading length 3rd row folded down / removed	-	1152 / 1650 mm	1552 / 2050 mm
Loading length 2nd row folded down / removed	-	2066 / 2537 mm	2466 / 2937 mm
Effective height	-	1369 mm	
Maximum internal width	-	1662 mm	
Width between wheel arches	-	1268 mm	
Sliding side hatch(es)			
Height	-	1284 mm	
Width to 100 mm / 600 mm	-	1030 / 907 mm	
Rear opening (mm)			
Door height 180° / tailgate	-	1320 / 1295 mm	
Width (to 70 mm)	-	1391 mm	
Loading sill	-	552 mm	

Cabs



PLATFORM CAB




L2

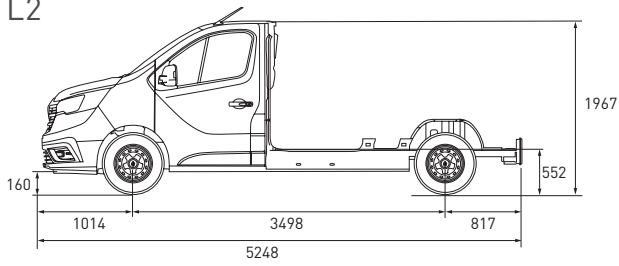


9-SEATER COMBI (available on diesel version only)



L1H1

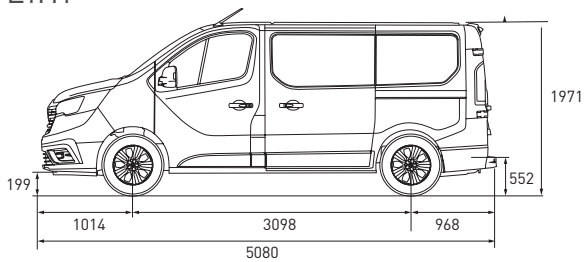

L2H1

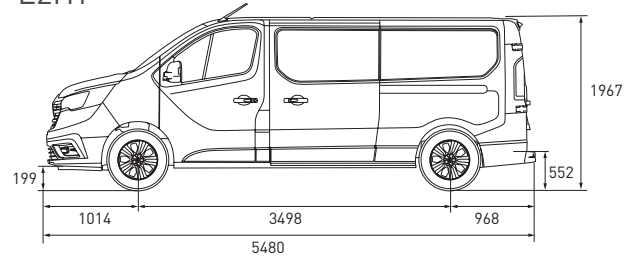



01/2024

We recommend Renault Trucks Oils.
Dimensions and characteristics are only indicative.
The manufacturer reserves the right to modify them without notice.
Renault Trucks SAS with a capital of € 50,000,000 - 954 506 077 RCS
Non contractual photos



**RENAULT
TRUCKS**

renault-trucks.com